

T51 PLUS

Triple 5.5" 2RU Rackmount Monitor



RACKMOUNT
2RU



5.5"×3
1920X1200



3G-SDI



HDMI



TALLY
INDICATOR



ALUMINIUM
HOUSING

>> KEY FEATURES

- FHD1920x1080 IPS, view details with confidence
- Triple 2RU rackmount, compact and lightweight design, which make it suitable for installing where the space is limited and also could be installed in the standard 19-inch rack.
- Intuitive button operation independently control each screen
- With VIDEO, AUDIO, HDMI, 3G-SDI input, suitable for a variety of signals
- Three-color tally indicator, enhance team cooperation
- Load custom 3D-LUT, preview film look
- All waves accurately analysis, save budget
- 3.5mm headphone jack output

>> 2RU Rack Mount Design



>> Full Range of Auxiliary Functions



3D LUT



Waveform



Vector



Histogram



Focus Assist



Embedded Audio



Over Exposure




Check Field




False Color



Time Code



Nine Grid



Safe Frames



Center Marker




Ratio Marker



Scan Mode



Aspect Ratio



Anamorphic



Image Flip



Image Freeze



Zoom


>> USB Upgrade/LUT File Import >> DC 12V, XLR Flexible Power Supply



>> PARAMETERS

Model	T51 PLUS
Screen size	5.5"x3
Resolution	1920×1080 pixels
Display Color	16.7M (8bit)
Dot pitch	0.0639(H)×0.0213(W) mm
Aspect Ratio	16:9
Brightness	400cd/m ²
Contrast	1000:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Inputs	HDMI, 3G/HD/SD-SDI, Audio(L/R), Video
Outputs	HDMI, 3G/HD/SD-SDI, Video
Audio	3.5mm stereo headphone jack
SDI Support Format	720p (60/59.94/50/30/29/25/24/23.98)
	1080i (60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
HDMI Support Format	480i/576i/480p/576p
	1080i (60/59.94/50)
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/23.98)
	4K 3840×2160p (30/29.97/25/24/23.98 Hz)
	4096×2160p (24Hz)
Power Consumption	≤25W
Input Voltage	DC 9V~24V
Operating Temperature	-20℃ ~ 55℃
Storage Temperature	-30℃ ~ 65℃
Install Way	Rack Mount
Unit Size	482.6Lx88Hx34D mm
Unit Weight	1418g

>> STRUCTURE

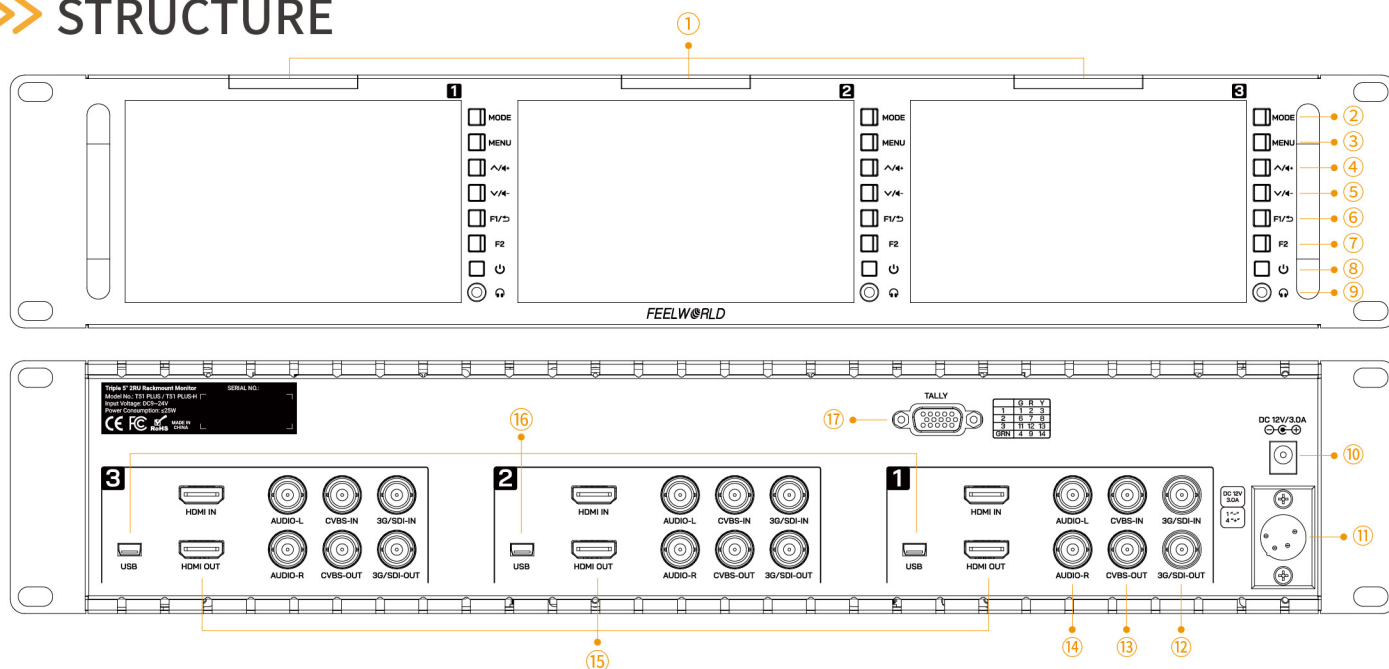

Number	Function instruction		Number	Function instruction	
①	/	Tally indicator	⑩	/	DC 12V power input
②	MODE	Input signal selection	⑪	/	4-pin XL power input
③	MENU	Menu enter/confirm button	⑫	3G/SDI-IN 3G/SDI-OUT	3G-SDI signal input (optional) 3G-SDI signal output (optional)
④	⏮/⏭	Previous item selection/parameters increasing; Volume increasing adjustment when menu without display	⑬	CVBS-IN CVBS-OUT	Composite video broadcast signal input Composite video broadcast signal output
⑤	⏮/⏭	Next item selection/parameters decreasing; Volume decrease adjustment when menu without display	⑭	AUDIO-L AUDIO-R	Audio signal left stereo input Audio signal right stereo input
⑥	F1/↩	Custom function shortcut button Menu return/exit	⑮	HDMI IN HDMI OUT	HDMI signal input HDMI signal output
⑦	F2	Custom function shortcut button	⑯	USB	Firmware update/LUT file importing
⑧	⏻	ON/Standby button	⑰	TALLY	TALLY indicator input
⑨	🎧	Earphone jack			

>> PACKAGEING LIST

				
Monitor	3A Power Adapter	Tally Kit	Mini USB to USB Cable	User Manual

HDMI®
HIGH-DEFINITION MULTIMEDIA INTERFACE

CE **FC**



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn