HAIVISION

Pro and Falkon Transmitters

Side-by-side comparison

Samuel Fleischhacker | Product Management

November 2026

Platform

Pro380	Pro360-5G	Pro460	Falkon X2 GO / Ultra	Falkon X4













HAIVISION

Web UI

Pro380 | Pro360-5G | Pro460

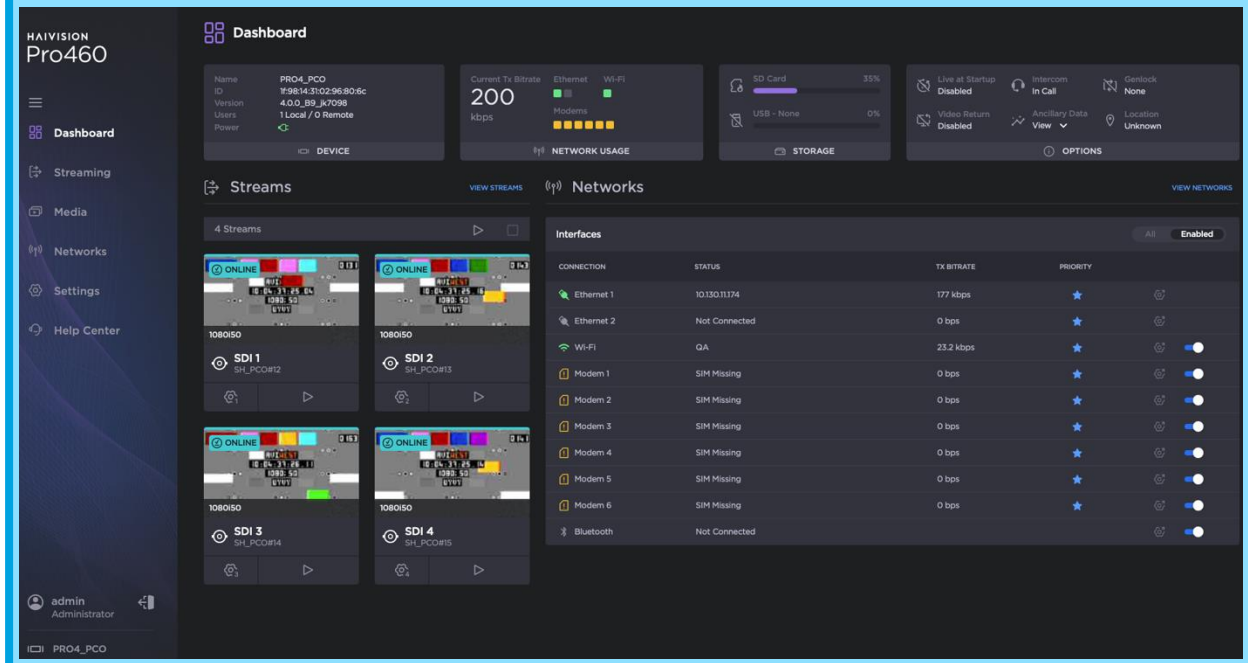


Falkon X2 (GO, Ultra) | Falkon X4

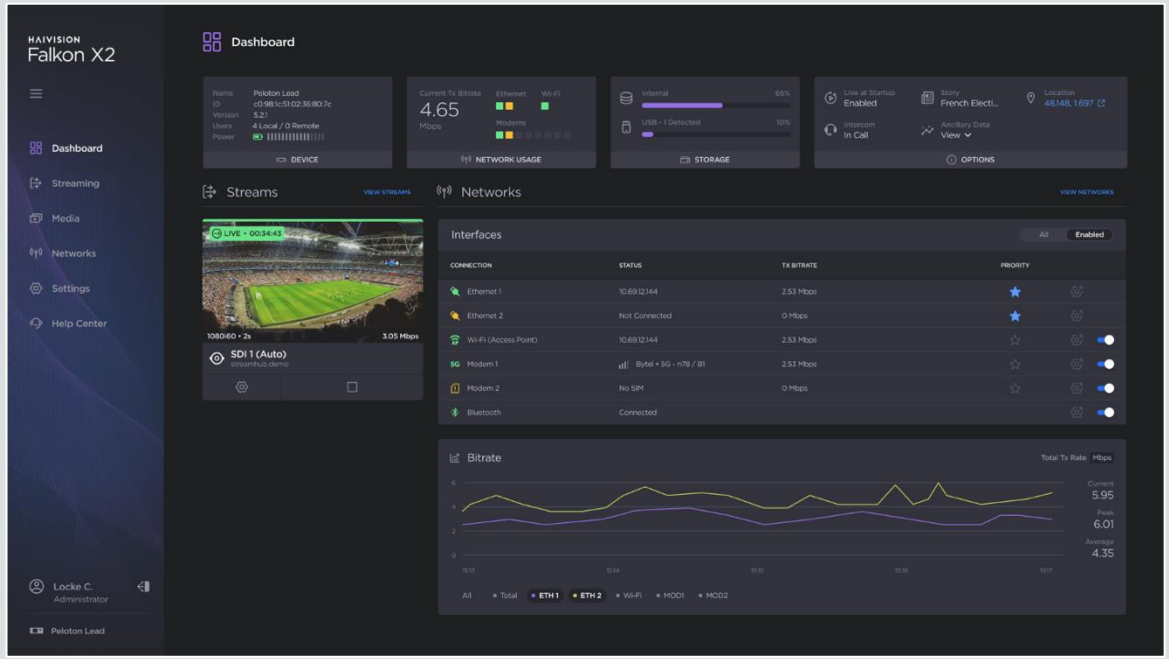



<< Common UI >>


Panel UI

Pro380 | Pro360-5G | Pro460

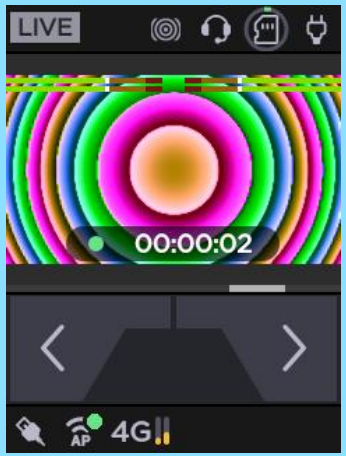


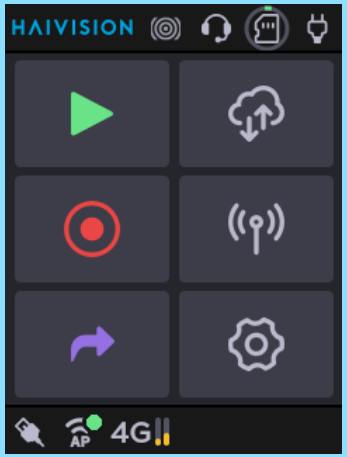


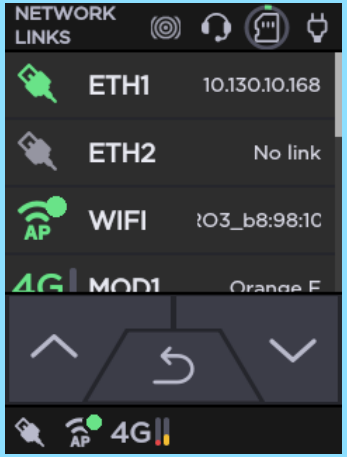


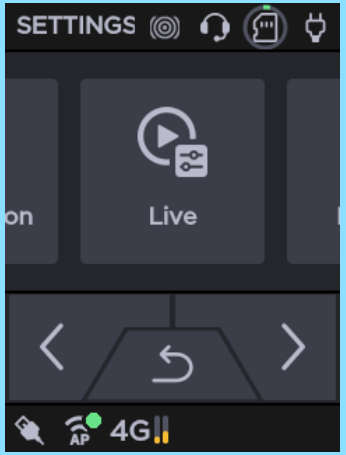


Falkon X2
GO | Ultra

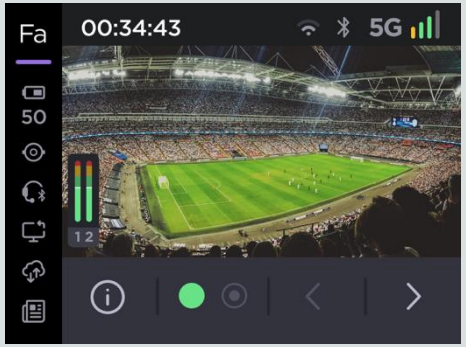

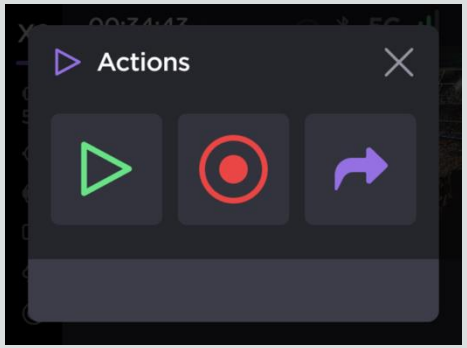

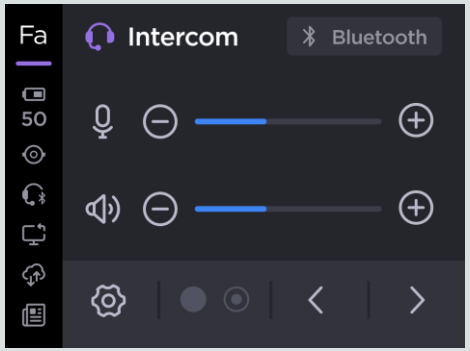

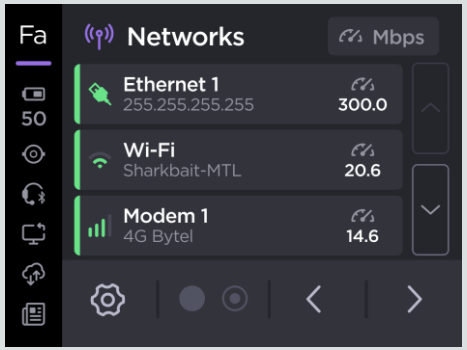

HAIVISION

New and improved on-board UI

Features - Operations

	Pro380	Pro360-5G	Pro460	Falkon X2 GO	Falkon X2 Ultra	Falkon X4
Live	✓	✓	✓ (x4)	✓	✓	✓
Record	✓	✓	✓	-	✓	✓
File Forward	✓	✓	✓	-	✓	✓
Intercom	✓	✓	✓	✓	✓	✓
Video Return	✓	✓	✓	✓	✓	✓
Data Bridge	✓	✓	✓	-	✓	✓
Hot Folder	✓	✓	✓	-	-	-
Ultra-Low Latency	-	-	✓	-	✓	✓
Target Cellular Network	Public	Public	Public	Public	Public/Private	Public

Features - Video

	Pro380	Pro360-5G	Pro460	Falkon X2 GO	Falkon X2 Ultra	Falkon X4
H.264 MPEG-4/AVC	✓	✓	✓	✓	✓	✓
HEVC	✓	✓	✓	✓	✓	✓
SD 480i59.94 576i50	✓	✓	-	-	-	-
HD 1080p23.98/24/25/29.97/30/50/59.94/60 1080i50/59.94/60, 720p50/59.94/60	✓	✓	✓	✓	✓	✓
UHD/4K 2160p23.98/24/25/29.97/30/50/59.94/60	-	-	✓	-	✓	✓
4:2:0 **8 bits**	✓	✓	✓	✓	✓	✓
4:2:0 | 4:2:2 **8 | 10 bits**	-	-	✓	-	✓	✓
HDR (HLG, PQ)	-	-	✓	-	✓	✓
Ancillary Data CC, Time Code, SMPTE2038	-	-	✓	-	✓	✓

Features - Audio

	Pro380	Pro360-5G	Pro460	Falkon X2 GO	Falkon X2 Ultra	Falkon X4
Audio Codec	AAC-LC	AAC-LC	AAC-LC	AAC-LC	AAC-LC	AAC-LC
Mono Channel	x4	x4	x8	x4	x8	x8
Mono Bitrate (per Mono channel)	32 – 256 kbps	32 – 256 kbps	32 – 256 kbps	32 – 256 kbps	32 – 256 kbps	32 – 256 kbps
Stereo Channel	x2	x2	x4	x2	x4	x4
Stereo Bitrate (per Mono channel)	64 – 512 kbps	64 – 512 kbps	64 – 512 kbps	64 – 512 kbps	64 – 512 kbps	64 – 512 kbps
Audio Interface	SDI HDMI Analog (x2)	SDI HDMI Analog (x2)	SDI	SDI HDMI	SDI HDMI	SDI HDMI

Features - Networks

	Pro380	Pro360-5G	Pro460	Falkon X2 GO	Falkon X2 Ultra	Falkon X4
4G/5G Modem (number)	x8 (*4G only)	x6	x6	x2	x2	x4
4G/5G Modem (generation)	3G/4G LTE	3GPP Rel. 15	3GPP Rel. 15	3GPP Rel. 16	3GPP Rel. 16	3GPP Rel. 17
Cellular Antenna	SISO (internal)	SISO (internal)	SISO (internal)	2x2 MIMO (internal)	2x2 MIMO (internal or external)	2x2 MIMO (internal)
Ethernet (GigE)	x2	x2	x2	x1	x1	x1
Wi-Fi (generation)	Wi-Fi 5 (2.4/5 GHz)	Wi-Fi 5 (2.4/5 GHz)	Wi-Fi 5 (2.4/5 GHz)	Wi-Fi 6E (2.4/5 GHz)	Wi-Fi 6E (2.4/5 GHz)	Wi-Fi 6E (2.4/5 GHz)
WiFi Antenna (internal)	2x2 MIMO (internal)	2x2 MIMO (internal)	2x2 MIMO (internal)	2x2 MIMO (internal)	2x2 MIMO (internal)	2x2 MIMO (internal)
BGAN	✓	✓	-	-	-	-
Satellite Ku/Ka/LEO	✓	✓	✓	✓	✓	✓
Bluetooth	✓	✓	✓	✓	✓	✓


Feature – I/O

I/O	Pro380	Pro360-5G	Pro460	Falkon X2 GO	Falkon X2 Ultra	Falkon X4
SDI input	3G-SDI (x1)	3G-SDI (x1)	12G-SDI (x1) 3G-SDI (x3)	3G-SDI (x1)	12G-SDI (x1)	12G-SDI (x1)
HDMI input	HDMI 1.4 (x1)	HDMI 1.4 (x1)	-	HDMI 1.4 (x1)	HDMI 2.0 (x1)	HDMI 2.0 (x1)
SDI output	3G-SDI (x1)	3G-SDI (x1)	12G-SDI (x1)	-	-	12G-SDI (x1)
HDMI output	HDMI 1.4 (x1)	HDMI 1.4 (x1)	HDMI 2.0 (x1)	HDMI 1.4 (x1)	HDMI 2.0 (x1)	HDMI 2.0 (x1)
Intercom	Mini-XLR	Mini-XLR Bluetooth	Mini-jack Bluetooth	Mini-jack Bluetooth	Mini-jack Bluetooth	Mini-jack Bluetooth
Camera control (6-pins, IP)	-	-	-	-	-	✓
USB-A	x2 (USB 3.0)	x2 (USB 3.0)	x2 (USB 3.0)	x2 (USB 3.0)	x2 (USB 3.0)	-
USB-C	-	-	x1 (USB 3.0)	x1 (USB 3.0)	x1 (USB 3.0)	x2 (USB 3.0)
GPS	✓	✓	✓	✓	✓	✓
Power Input	XLR 3 pin	XLR 3 pin	Mini-jack (Switchcraft)	USB-C (65W min)	USB-C (65W min)	USB-C (65W min)

Feature - Misc

	Pro380	Pro360-5G	Pro460	Falkon X2 GO	Falkon X2 Ultra	Falkon X4
Storage	SD	SD	Micro SD	Internal (128 GB)	Internal (128 GB)	Internal (128 GB)
Internal Battery (autonomy)	-	-	-	✓ (2h)	✓ (2h)	✓ (5mn) for hotswap
Camera mounting (V-Mount | Gold Mount)	✓	✓	✓	-	-	✓
Backpack	✓	✓	✓	✓	✓	✓
Panel screen size (mm)	47 x 39	47 x 39	47 x 39	47 x 39	47 x 39	47 x 39
Size (cm)	24.5 x 8.4 x 12.5	25.6 x 8.5 x 12.4	26.6 x 8.5 x 12.4	20.4 x 7.6 x 11.3	20.4 x 7.6 x 11.3	25.6 x 8.5 x 11.3
Weight	1.43 Kg	1.4 Kg	1.5 Kg	1.2 Kg	1.2 Kg	1.4 Kg

Best fit for

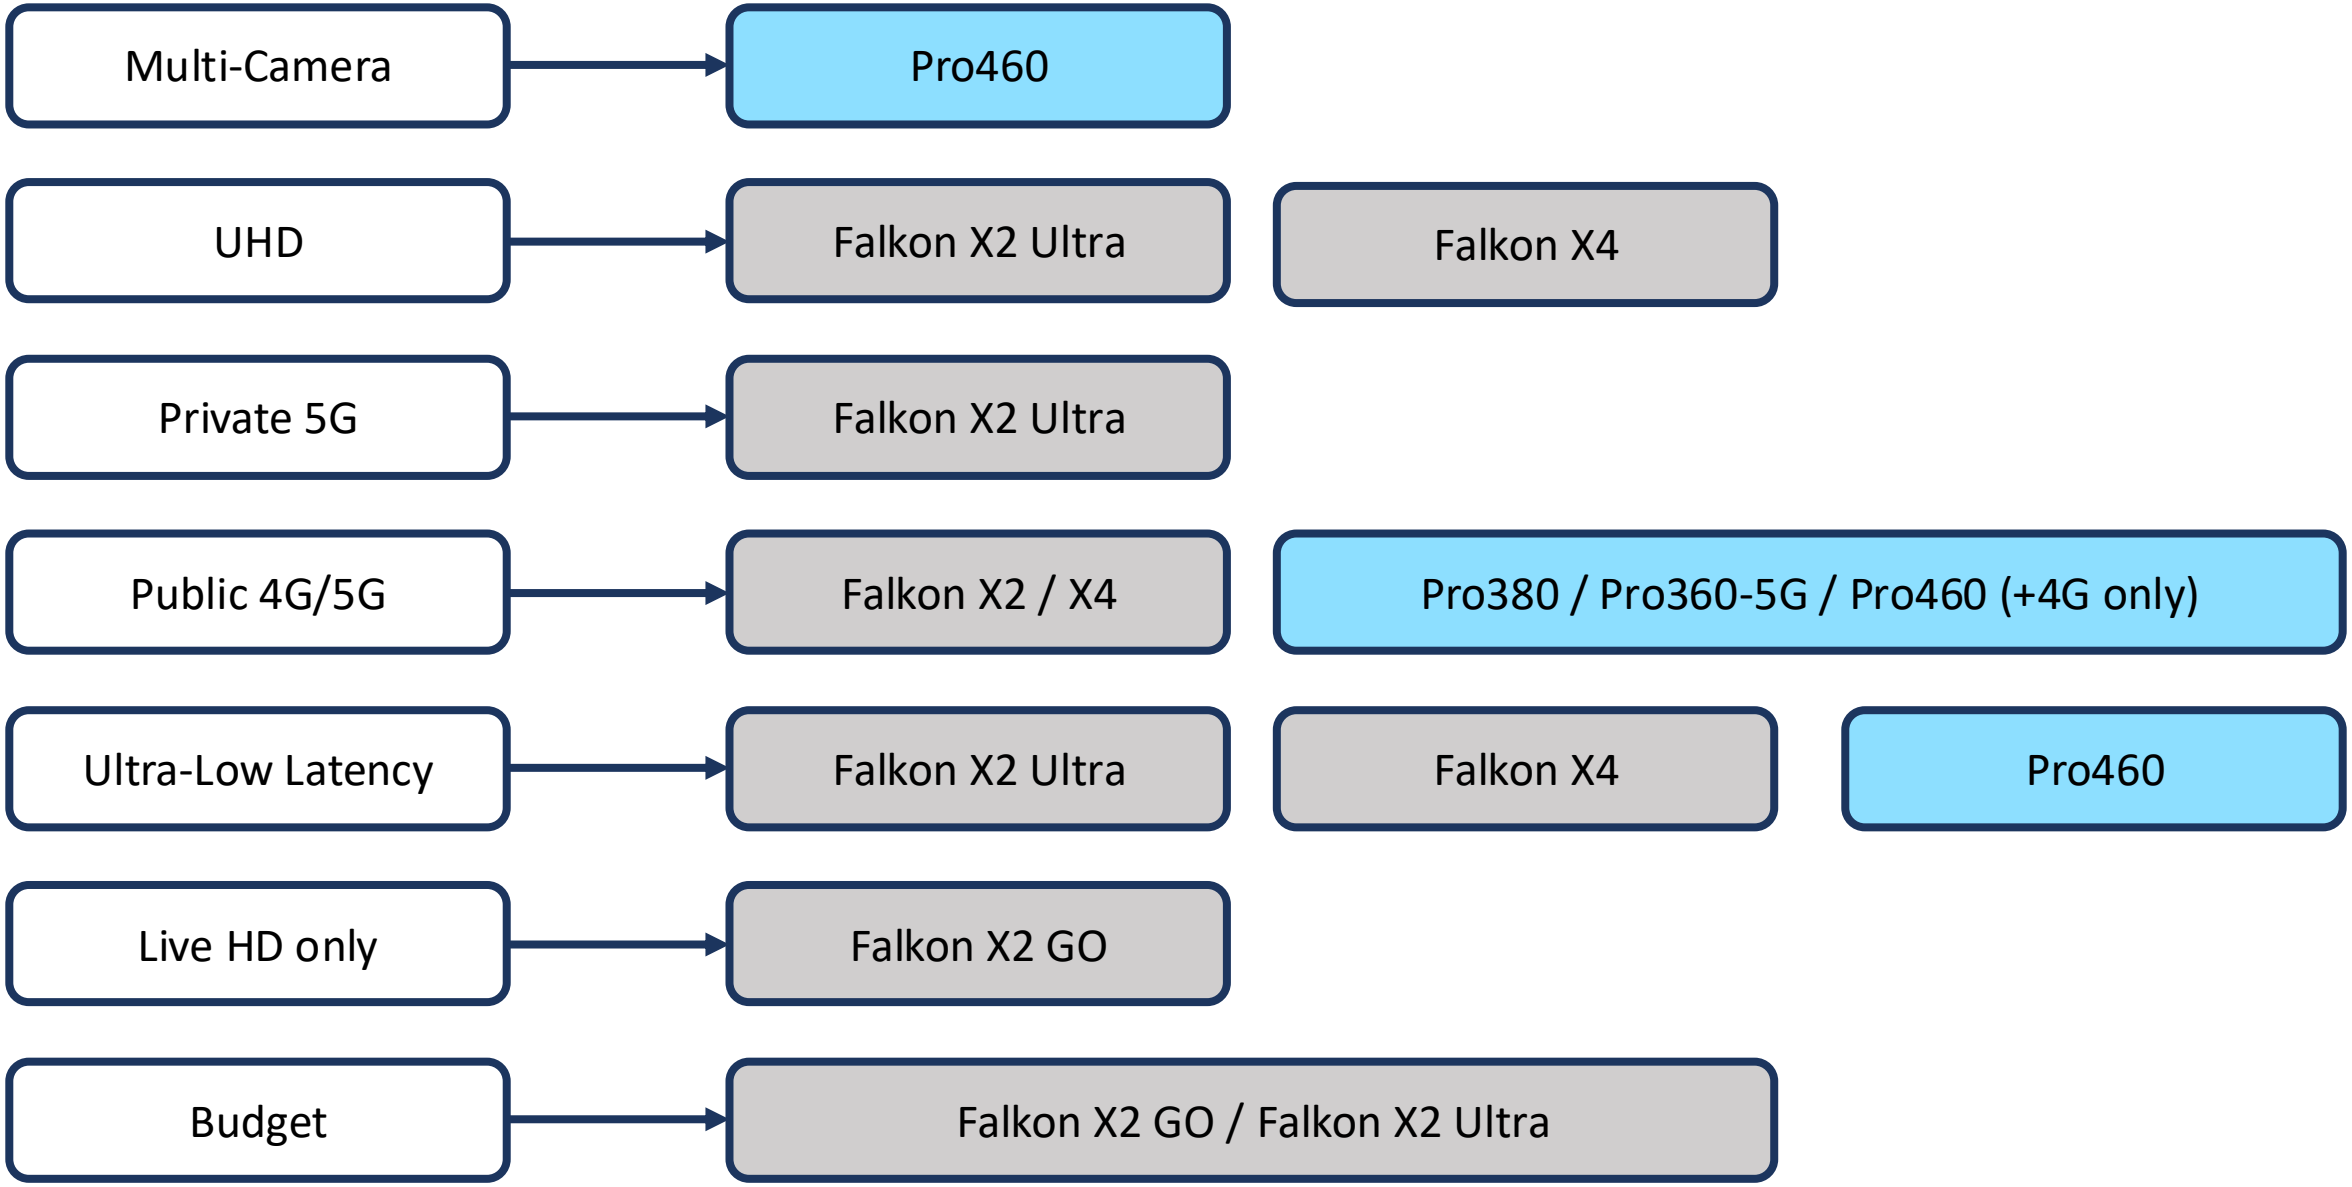

HAIVISION





videosolutions@haivision.com

haivision.com