



Ultra miniature and light.

With the VT401 Voice Technologies presents a very small and extremely lightweight RF protected electret condenser microphone. Fitted with an ultra-miniature microphone capsule, it is in most cases almost unnoticeable and easy to place.








Ideal for inconspicuous placement for performing talent in broadcast, theatre, production and film sound.

Colors: black, beige (other colors on request)

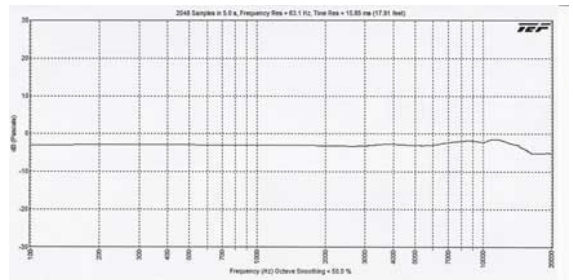
Application area: Stage - Theatre - Film - Broadcast







The Voice Technologies VT401 comes in the solid, waterproof VTO box with the following accessories:



| | | |
|---|------------|---|
|  | AC4 | Alligator Clip: The holder has a 30 degree angle for better presence. Thanks to the 30 degrees the holder points slightly forward instead of up. |
|  | DM4 | Dracula Mount: The holder has a 30 degree angle for better presence. Thanks to the 30 degrees the holder points slightly forward instead of up. |
|  | MMC4 | Miniature Magnetic Clip: Can be fixed either on the clothes or worn around the neck with the included nylon yarn. |
|  | RBM2 | Rubber Body Mount: Perfect tool to mount the lavalier mic absolutely invisible. Put the mic into the hole at the side until the top is in the middle of the front hole. |
|  | Wsi401/403 | Miniature Windscreen: A nearly invisible windscreen. Prevents from distortion air while speaking. |
|  | WS400/700 | Windscreen with acoustic cap: Perfect for light wind, for example from speech |
|  | CAP400 | Frequency response with cap +2dB |

| Specifications | | Wiring Configuration (2-wire): | |
|---------------------|---|--------------------------------|-----------|
| Generating Element: | Electret Condenser | Green | Ground |
| Polar Pattern: | Omni-Directional | Copper | NF + +VDC |
| Frequency Range: | 20Hz- 20kHz | | |
| Sensitivity: | -46dB ±3dB 1V/microbar (5mV/Pa) | | |
| Noise level: | +30dB "A" weighted | | |
| Max. Input SPL: | 125dB | | |
| Impedance: | 4.5kOhm (3-6kOhm) | | |
| Bias/+VDC: | 0.8V to 5V (max.) | | |
| Colors: | black, beige (other colors on request) | | |
| Size: | 8x3,2mm | | |
| Cable: | Length 1,5m Ø 1,0mm | | |
| Weight: | 5 g | | |



| | | |
|---|---|---|
|  |  |  |
|  |  |  |
| VT401 mounted on a tie | AC4 Alligator Clip with Wsi Miniature Wind-screen | MMC mounted on a shirt |